



Cutting Edges

Double Beveled

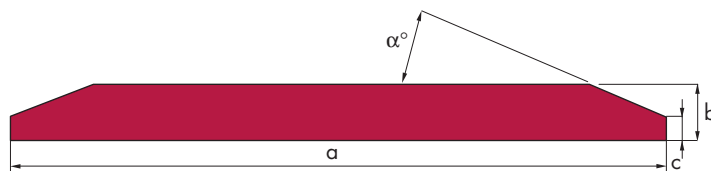

Designation	Weight	Area of section	Dimensions			
	kg/m	cm ²	a mm	b mm	c mm	α°
IL 31 ⁺	18,3	23,3	165	16,0	4,0	25°00'
IL 32	74,5	94,9	406	25,0	8,5	22°30'
IL 35	23,5	29,9	203	16,0	5,0	25°00'
IL 36	85,7	109,1	406	28,5	12,0	22°30'
IL 37	86,9	110,8	330	35,0	21,0	22°30'
IL 40	28,3	36,0	203	19,0	8,0	25°00'
IL 41	61,1	77,8	330	25,0	11,0	22°30'
IL 42	48,1	61,3	280	25,0	6,0	22°30'
IL 45	37,8	48,2	203	25,0	14,0	25°00'
IL 49	55,3	70,4	305	25,0	9,5	22°30'
IL 50	35,0	44,6	254	19,0	6,0	25°00'
IL 51	74,8	95,2	360	30,0	7,0	22°30'
IL 55	47,0	59,9	254	25,0	12,0	25°00'
IL 59	79,2	100,9	330	32,0	18,0	22°30'
IL 60	70,1	89,3	330	28,5	14,5	22°30'
IL 61	106,4	135,5	406	35,0	18,5	22°30'
IL 64	102,5	130,6	330	41,0	27,0	22°30'

Curved Double Beveled

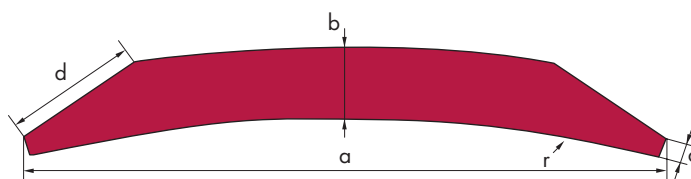

Designation	Weight	Area of section	Dimensions				
	kg/m	cm ²	a mm	b mm	c mm	d mm	r mm
IL 02	28,1	35,8	203,2	19	5,6	33,3	273
IL 06	38,2	48,7	203,2	25,4	11,9	33,3	273
IL 15	23,1	29,5	203,2	15,9	2,4	33,3	273

+ Please consult our technical assistants.